

Windsor Dummy Lever Lever



Features

- Solid die cast construction with weight balanced spring cassette
 The perfect balance between price and performance
- Flexible purpose component
 Enables all aspects of a job to be completed as a perfectly matching set
- Sculpted ergonomic lever and low friction nylon bush Easy to grip and smooth action
- Wide backplate
 To accommodate larger cylinder preparation
- Compact baseplate with screws in close proximity Combats lever attack
- Supplied with screw and spindle pack to suit 60-70mm profiles
 Everything needed for installation included
- Baseplate in common with all Windsor handles
 Same routing detail regardless of product variant chosen
- Colour coordinated screw heads
 Perfectly matching hardware, even down to the smallest details
- Supplied fully assembled
 Simple and quick installation, no need to fit springs or lever
- Supplied with care instructions
 Helps the homeowner to keep the hardware in optimal condition
- Silicon Site-Protectors available
 Ensures perfect condition after installation
- Each part packaged in a separate chamber, but supplied as a set No scratching of parts during transit













Hardex Chrome



Silver





Antique Black





White



Windsor Dummy Lever Lever

| Ordering Details Product | |
|--------------------------|----------|
| | |
| Finish | Part No. |
| Hardex Chrome | 1F401 |
| Hardex Bronze | 1F403 |
| Hardex Gold | 1F405 |
| Antique Black | 1F406 |
| White | 1B150 |
| Black | 1B151 |
| Silver | 1B152 |

For additional part numbers please contact our sales office.

Technical Information Corrosion resistance Meets the requirements of BS EN 1670:2007 Grade 5 (480 hours) Operation Endurance tested in excess of 200,000 cycles Performance Tested to meet the requirements of PAS 24 as part of a compliant door set **Material Specification** Handle Grip and Backplate: High quality Zinc for all Hardex finishes and Antique Black. High quality Aluminium for White, Black and Silver Hardex Chrome, Hardex Bronze, Coatings: Hardex Gold, Antique Black, White, Black and Silver Spindle / Screws: Machine screws with colour coordinated heads for handle. 60mm - 70mm profiles (1 x 8mm x 120mm spindle; 2 x M5 x 70mm and 2x M5 x 80mm screws) Euro Cylinder, 92mm PZ Cylinder:


Maintenance

For continued protection of the quality finish and appearance, we advise routine cleaning of all our external hardware. We recommend wiping it with a clean cloth soaked in warm water and mild detergent every month. Please refrain from using heavy-duty cleaners, containing Chlorine or Potassium. Moving parts should also be lightly lubricated using a light non-acidic mineral oil (e.g., "3 in 1") at least twice per year. The product may need to be adjusted and fixings tightened to ensure a satisfactory operation. This procedure is particularly essential if products are used within a 25-mile radius of coastal areas or close proximity to building sites or large industrial areas, where more frequent cleaning may be required to prevent the accumulation of corrosive contaminants.

Packaging

Handles

Individually bagged with screws, spindle and care instructions. 15 handles in an outer box.

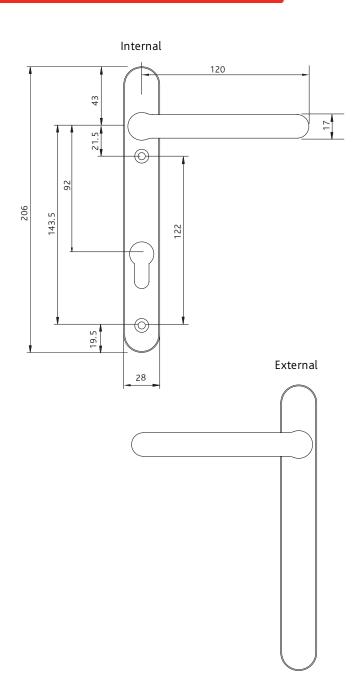

All dimensions are in mm and are nominal. Fab&Fix reserves the right to change specification without notice It is the responsibility of the door manufacturer to ensure that the finished product meets any required safety and performance specification.