

Windsor Inline Lever Pad Unsprung



Features

- **Solid die cast Zinc construction**
Sturdy feel
- **Compact baseplate with screws in close proximity**
Combats lever attack
- **Sculpted ergonomic lever and low friction nylon bush**
Easy to grip and smooth action
- **Supplied with screw pack to suit 60-70mm profiles**
Everything needed for installation included
- **Colour coordinated screw heads**
Perfectly matching hardware, even down to the smallest details
- **Baseplate in common with all Windsor handles**
Same routing detail regardless of product variant chosen
- **Wide backplate**
To suit cylinder guards and accommodate larger cylinder preparation
- **Supplied with care instructions**
Helps the homeowner to keep the hardware in optimal condition
- **Each part packaged in a separate chamber, but supplied as a set**
No scratching of parts during transit



Hardex
Chrome




Hardex
Bronze



Hardex
Gold



White



Antique
Black

Windsor Inline Lever Pad Unsprung

Ordering Details

Product

Windsor Inline Lever Pad Unsprung

Finish

Part No.

Hardex Chrome	1F151
Hardex Bronze	1F153
Hardex Gold	1F155
Antique Black	1F156
White	1F150

Technical Information

Corrosion resistance

Meets the requirements of BS EN 1670:2007 Grade 5 (480 hours)

Operation

Endurance tested in excess of 200,000 cycles

Performance

Tested to meet the requirements of PAS 24 as part of a compliant door set

Material Specification

Handle Grip and Backplate:	High quality Zinc for all finishes
Coatings:	Hardex Chrome, Hardex Bronze, Hardex Gold, Antique Black and White
Screws:	Machine screws with colour coordinated heads for handle. 60mm - 70mm profiles (2 x M5 x 70mm and 2x M5 x 80mm screws) Please contact your lock manufacturer to obtain a split spindle that works with this handle set
Cylinder:	Euro Cylinder, 92mm PZ


Maintenance

For continued protection of the quality finish and appearance, we advise routine cleaning of all our external hardware. We recommend wiping it with a clean cloth soaked in warm water and mild detergent every month. Please refrain from using heavy-duty cleaners, containing Chlorine or Potassium. Moving parts should also be lightly lubricated using a light non-acidic mineral oil (e.g. "3 in 1") at least twice per year. The product may need to be adjusted and fixings tightened to ensure a satisfactory operation. This procedure is particularly essential if products are used within a 25-mile radius of coastal areas or close proximity to building sites or large industrial areas, where more frequent cleaning may be required to prevent the accumulation of corrosive contaminants.

Packaging

Handles

Individually bagged with screws and care instructions.
15 handles in an outer box.

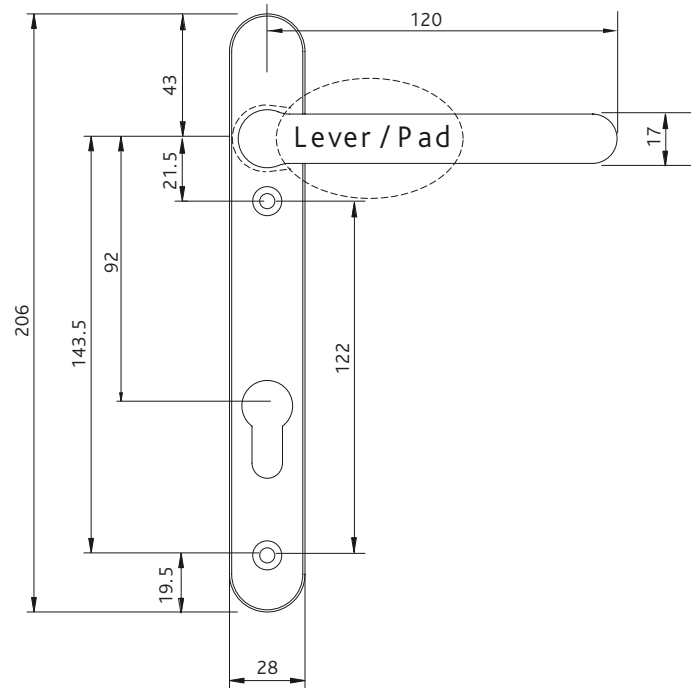

All dimensions are in mm and are nominal.
Fab&Fix reserves the right to change specification without notice
It is the responsibility of the door manufacturer to ensure that the finished product meets any required safety and performance specification.