

BS Kitemarked 6 Pin Invincible Door Cylinder






Features

- This patented protected design completely removes the ability to break into a cylinder
- With a newly designed robust 'squared' off platform that significantly strengthens the mechanism against attack; customers will be able to use this as a true unique selling point
- With 85% more metal than a standard euro cylinder this unique British Standard Kitemark cylinder is the powerhouse of the lock world
- The full range of lock case, cylinder and handle creates the ultimate in door security solution
- Independently tested to meet the latest security standards, the Invincible is fully Kitemarked and certified to TS007-1:2014+A2:2018 and BS EN 1303:2015
- Suitable for PAS 24 2012 applications as a constituent part of a compliant door set
- Manufactured from solid brass
- Engineered for ease of application and long term trouble free performance
- High security hardened 6 pins for anti-pick, anti-drill, anti-snap and anti-bump resistance; offering excellent resistance to forced entry
- Double and Thumbturn cylinder options
- Brass and satin finishes available
- In excess of 30000 key differs
- Finally, Britain's homes can get the security they deserve Invincible security!



EXTERNAL DOORS

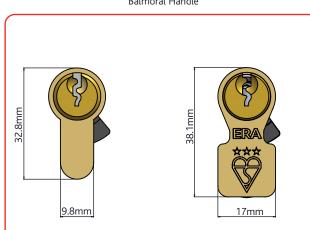







r Composite PVCu

Secured by Design



Eive times bigger across the weaker



BS Kitemarked 6 Pin Invincible Door Cylinder

| Ordering Details | | | | | | | |
|------------------|---------------------|-------|----------------|--------|-----------------|--|--|
| Di A | Dimensions A B C | | No. of Pins | Finish | Part No. | | |
| Doi | Double | | | | | | |
| 35 | 35 | 70 | 6 | Brass | BS-INV-3535-31 | | |
| 35 | 35 | 70 | 6 | Satin | BS-INV-3535-51 | | |
| 35 | 45 | 80 | 6 | Brass | BS-INV-3545-31 | | |
| 35 | 45 | 80 | 6 | Satin | BS-INV-3545-51 | | |
| 40 | 40 | 80 | 6 | Brass | BS-INV-4040-31 | | |
| 40 | 40 | 80 | 6 | Satin | BS-INV-4040-51 | | |
| 40 | 45 | 85 | 6 | Brass | BS-INV-4045-31 | | |
| 40 | 45 | 85 | 6 | Satin | BS-INV-4045-51 | | |
| 40 | 50 | 90 | 6 | Brass | BS-INV-4050-31 | | |
| 40 | 50 | 90 | 6 | Satin | BS-INV-4050-51 | | |
| 40 | 55 | 95 | 6 | Brass | BS-INV-4055-31 | | |
| 40 | 55 | 95 | 6 | Satin | BS-INV-4055-51 | | |
| 40 | 60 | 100 | 6 | Brass | BS-INV-4060-31 | | |
| 40 | 60 | 100 | 6 | Satin | BS-INV-4060-51 | | |
| 45 | 45 | 90 | 6 | Brass | BS-INV-4545-31 | | |
| 45 | 45 | 90 | 6 | Satin | BS-INV-4545-51 | | |
| 45 | 50 | 95 | 6 | Brass | BS-INV-4550-31 | | |
| 45 | 50 | 95 | 6 | Satin | BS-INV-4550-51 | | |
| 45 | 55 | 100 | 6 | Brass | BS-INV-4555-31 | | |
| 45 | 55 | 100 | 6 | Satin | BS-INV-4555-51 | | |
| 50 | 50 | 100 | 6 | Brass | BS-INV-5050-31 | | |
| 50 | 50 | 100 | 6 | Satin | BS-INV-5050-51 | | |
| Doι | ıble ' | Thumb | turn | | | | |
| 35 | 35 | 70 | 6 | Brass | BS-INV-T3535-31 | | |
| 35 | 35 | 70 | 6 | Satin | BS-INV-T3535-51 | | |
| 40 | 40 | 80 | 6 | Brass | BS-INV-T4040-31 | | |
| 40 | 40 | 80 | 6 | Satin | BS-INV-T4040-51 | | |
| 50 | 50 | 100 | 6 | Brass | BS-INV-T5050-31 | | |
| 50 | 50 | 100 | 6 | Satin | BS-INV-T5050-51 | | |
| | | | | | | | |

Please contact the sales office for details of lock and handle part codes.


Maintenance

All moving parts should be lightly lubricated using a light non-acidic mineral oil. (e.g. "3 in 1") twice per year and the surface cleaned with a soft damp cloth. The product may need to be adjusted and fixings tightened to ensure a satisfactory operation.

Packaging

Cylinders

Individually boxed, including screws and 3 keys. 10 in an outer box.

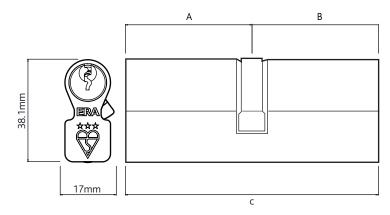

EXTERNAL DOORS

All dimensions are in mm and are nominal. ERA reserves the right to change specification without notice It is the responsibility of the door manufacturer to ensure that the finished product meets any required safety and performance specification.

| Classification | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|--|
| The Invincible has been approved to BS EN 1303:2015 and carries the following classification: | | | | | | | | | |
| Category | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | |
| Classification | 1 | 6 | 0 | 0 | 0 | С | 5 | 2 | |

Technical Information

Corrosion resistance Meets the requirements of BS EN 1670 Grade 3

Operation

Endurance tested in excess of 100,000 cycles

Performance (Excluding Thumbturn)

Independently tested to meet the requirements of BS EN 1303:2015 and accredited to TS0073*. BSI Kitemark License No. 553031. Designed to meet the requirements of PAS 24 in a compliant door set.

| Material Specification | | | | | |
|------------------------|---|--|--|--|--|
| Cylinder: | Brass | | | | |
| Cam: | Sintered Steel | | | | |
| Pins: | 6 Hardened pins, anti snap anti pick, anti-drill, anti bump | | | | |
| Кеу: | Nickel plated brass | | | | |
| Screw: | M5 x 50mm and M5 x 60mm nickel plates or polished brass screw | | | | |
| Finish: | Brass (natural), Satin plated brass | | | | |