

### Numbers 0-9




## Features

- **Designed for Panel, Timber, PVCu and Composite Doors**  
Flexible use
- **Classic design with a contemporary twist**  
Create an elegant and stylish front door
- **Supplied with colour coordinated screws**  
Perfectly matching hardware, even down to the smallest details



Hardex  
Chrome




Hardex  
Graphite



White




Hardex  
Bronze




Hardex  
Gold




Black



Premium  
Satin



Antique  
Black



Silver

## Numbers 0-9

### Ordering Details

#### Numbers 0 - 9

Finish	Part No.								
	0	1	2	3	4	5	6 or 9	7	8
Hardex Chrome	4B304	4B354	4B404	4B454	4B504	4B554	4B604	4B654	4B704
Hardex Bronze	4B306	4B356	4B406	4B456	4B506	4B556	4B606	4B656	4B706
Hardex Gold	4B308	4B358	4B408	4B458	4B508	4B558	4B608	4B658	4B708
Hardex Graphite	4B312	4B362	4B412	4B462	4B512	4B562	4B612	4B662	4B712
Antique Black	4B309	4B359	4B409	4B459	4B509	4B559	4B609	4B659	4B709
White	4B300	4B350	4B400	4B450	4B500	4B550	4B600	4B650	4B700
Black	4B301	4B351	4B401	4B451	4B501	4B551	4B601	4B651	4B701
Silver	4B302	4B352	4B402	4B452	4B502	4B552	4B602	4B652	4B702
Premium Satin	DFNNUPS-0	DFNNUPS-1	DFNNUPS-2	DFNNUPS-3	DFNNUPS-4	DFNNUPS-5	DFNNUPS-6	DFNNUPS-7	DFNNUPS-8

### Technical Information

#### Corrosion resistance

Meets the requirements of BS EN 1670:2007 Grade 5 (480 hours)

### Material Specification

Numerals:	High quality Zinc
Coatings:	Hardex Chrome, Hardex Bronze, Hardex Gold, Hardex Graphite, Antique Black, Premium Satin, White and Silver
Screws:	Includes 2 X M3.5 x 25mm colour coordinated countersunk flat head screw


### Maintenance

For continued protection of the quality finish and appearance, we advise routine cleaning of all our external hardware. We recommend wiping it with a clean cloth soaked in warm water and mild detergent every month. Please refrain from using heavy-duty cleaners, containing Chlorine or Potassium. Moving parts should also be lightly lubricated using a light non-acidic mineral oil (e.g., "3 in 1") at least twice per year. The product may need to be adjusted and fixings tightened to ensure a satisfactory operation. This procedure is particularly essential if products are used within a 25-mile radius of coastal areas or close proximity to building sites or large industrial areas, where more frequent cleaning may be required to prevent the accumulation of corrosive contaminants.

### Packaging

#### Numerals

Individually bagged with screws and care instructions.  
10 in an outer box.

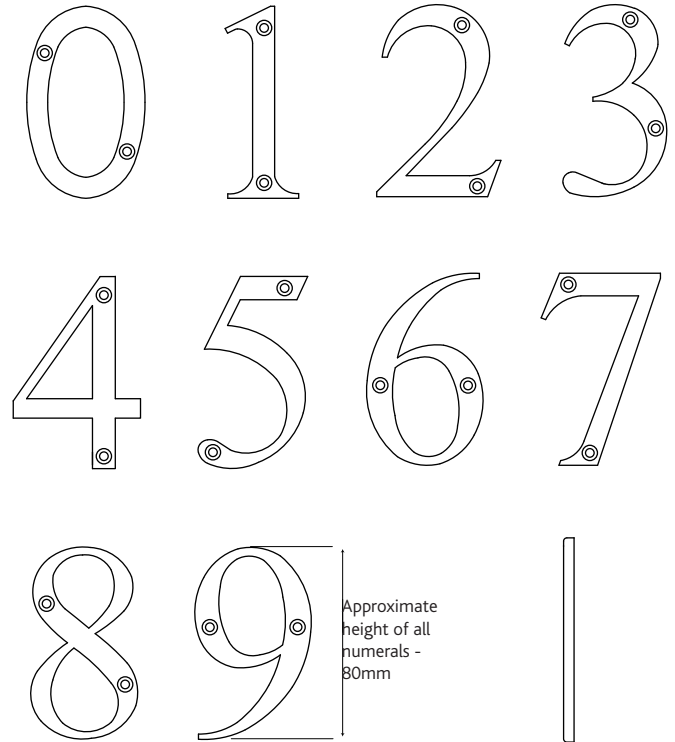

2 x Screws Provided  
Per Numeral



Standard width of  
all letters and  
numerals - 4.50mm

All dimensions are in mm and are nominal.  
Fab&Fix reserves the right to change specification without notice.  
It is the responsibility of the door manufacturer to ensure that the finished product meets any required safety and performance specification.