


### ERA Extreme Shootbolt Window Lock



### Features

- A shootbolt locking system that has been designed to prevent attack on all 3 planes - back and forward, side to side, and up and down giving unattainable levels of security
- Non-croppable shootbolt locking system with a minimum of 8 points locking giving you the ultimate burglar deterrent
- Tested by an independent test laboratory to over 6,000N force; more than double the requirement of the PAS24: 2012 security test
- Heavy duty bolt has up to 300% of the contact area against competitor shootbolts thus providing the most secure shootbolt on the market
- Patented docking system of the bolt into the keep ensures smooth operation and prevents sideways movements of the bolt when under attack
- Compatible with standard zinc espag keeps or the unique Power Brace keeps; that have a weather resistant nylon base combined with a 2mm hardened steel plate for significantly increased performance
- Upgrade to enhanced security with 3D locking pins fitted to the shootbolt and extended Power Brace keeps for upto 11 locking points
- Developed to withstand even the most determined intruder attack

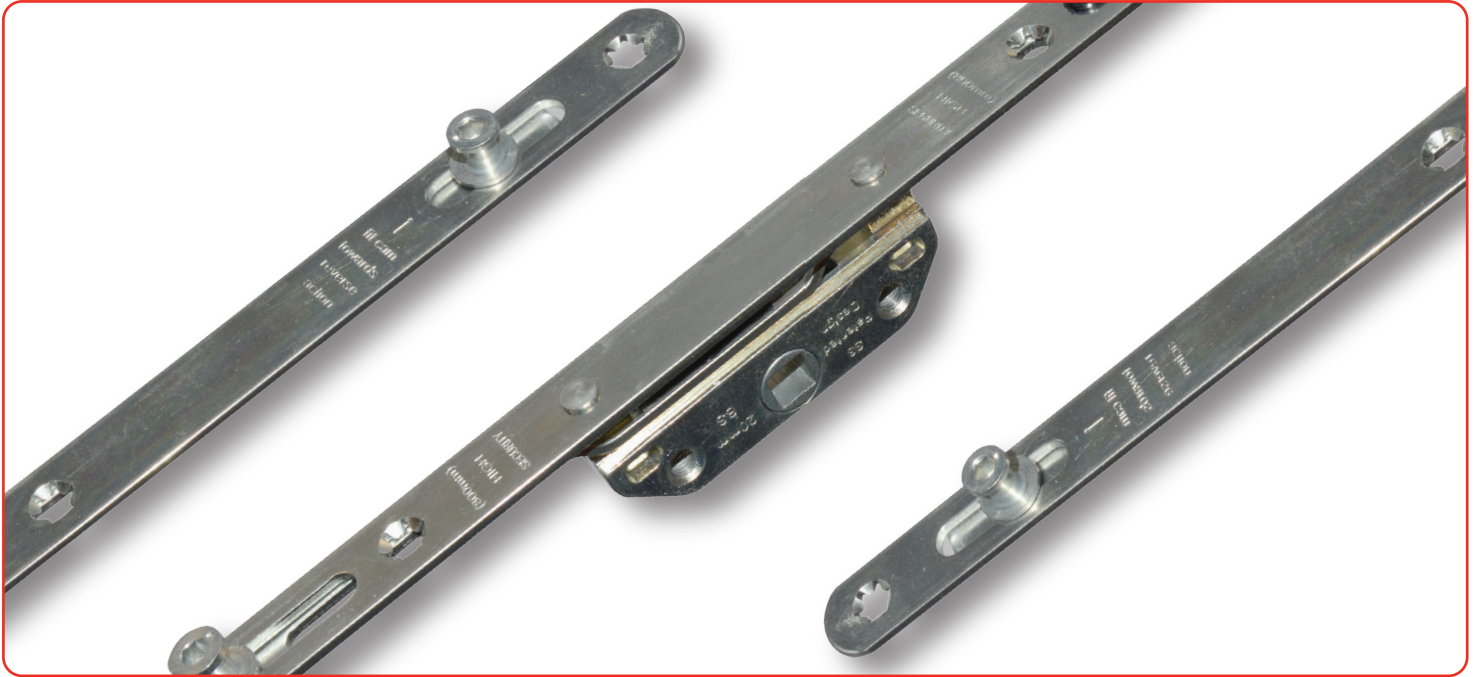

Shootbolt

### Ordering Details

#### Bars

Bars	Bar Length	No. of Cams	Part Code 20mm Backset	Part Code 22mm Backset
1	190mm	0	WLFSVS1201	WLFSVS1221
2	230mm	2	WLFSVS1202	WLFSVS1222
3	400mm	2	WLFSVS1203	WLFSVS1223
4	600mm	2	WLFSVS1204	WLFSVS1224
5	800mm	3	WLFSVS1205	WLFSVS1225
6	1000mm	3	WLFSVS1206	WLFSVS1226
7	1200mm	3	WLFSVS1207	WLFSVS1227

(please see additional information sheet for details on Sash Rebate sizes)

#### Easy Reach

1	1200mm	2	WLFSVS1208	WLFSVS1228
---	--------	---	------------	------------

### ERA Extreme Shootbolt Window Lock

#### Ordering Details

##### Shootbolt Extensions and Optional Extras

Profile	Gearbox Backset	Part Code Shootbolt Extensions (pairs)	Part Code 3D Security 7-10mm Cams (each)	Part Code 3D Security 9-12mm Cams (each)	Part Code 3D Security Plates
Deceuninck 2500	20	WLFSSB1100X	WLF3D0001	WLF3D0002	WWKFS3DP01
Deceuninck 2800	20	WLFSSB1100X	WLF3D0001	WLF3D0002	WWKFS3DP01
Duraflax Diamond	20	WLFSSB1500X	WLF3D0001	WLF3D0002	WWKFS3DP02
Eurocell Logik	20	WLFSSB1100X WLFSSB1500X	WLF3D0001	WLF3D0002	WWKFS3DP01
Eurocell Modus	20				
Eurocell Ultimate 70	20	WLFSSB1500X			
Liniar 70	22	WLFSSB1100X	WLF3D0001	WLF3D0002	WWKFS3DP01
Kommerling 70	22	WLFSSB1500X	WLF3D0001	WLF3D0002	WWKFS3DP01
Overlo/ Chamfer					
Profile 22 70	20	WLFSSB1100X			
Rehau 706	22	WLFSSB1500X			
Rehau Tritec 60	20	WLFSSB1500X			
Rehau Calibre					
Spectus Elite	20	WLFSSB1500X	WLF3D0001	WLF3D0002	WWKFS3DP04
Swish 70	22	WLFSSB1500X			
Synseal Legend 70	20	WLFSSB1100X	WLF3D0001	WLF3D0002	WWKFS3DP04
Synseal Shield		WLFSSB1100X			
Synseal Synergy	20	WLFSSB1100X	WLF3D0001	WLF3D0002	WWKFS3DP05
Veka Matrix 58 & 70	22	WLFSSB1100X			
WHS Halo Eclipse	22	WLFSSB1100X	WLF3D0001	WLF3D0002	WWKFS3DP01
WHS Halo Rustique	22	WLFSSB1100X	WLF3D0001	WLF3D0002	WWKFS3DP01
WHS Halo WHS 10	22	WLFSSB1100X	WLF3D0001	WLF3D0002	WWKFS3DP01

(please see additional information sheet for details of Shootbolt Extension sizes)

NB: Shootbolt Extensions - 'X' within part code to be substituted with shootbolt bar number required.

Usually 11mm = 13mm profile stack heights, 15mm = 17mm profile stack heights

#### Technical Information

##### Corrosion resistance

Meets the requirements of BS EN 1670:2007 Grade 5 (480 hours)

##### Operation

Tested in excess of 50,000

##### Performance

Tested independently to 6000n force, twice that of the usual PAS24:2012 test requirements

#### Material Specification

Bars:	High quality steel, Zinc plated, Trivalent passivated and seal
Keeps:	High quality steel, Zinc plated, Trivalent passivated and seal or Composite keeps with steel top plates
Shootbolts:	High quality steel

#### Packaging

##### Locking Bars

20 locks per box

##### Cam Keeps

125 keeps per box

##### Shoot Keeps

60 pairs per box

##### Shoot Plates

100 pairs per box

##### Shoot Extensions

25 per box

##### 3D Cam

500 per box

##### 3D Plates

100 per box

#### Maintenance

All moving parts should be lightly lubricated using a light non-acidic mineral oil (e.g "3 in 1") twice per year and the surface cleaned with a soft damp cloth. The product may need to be adjusted and fixings tightened to ensure a satisfactory operation.