



## 4000 Link Trickle Vent

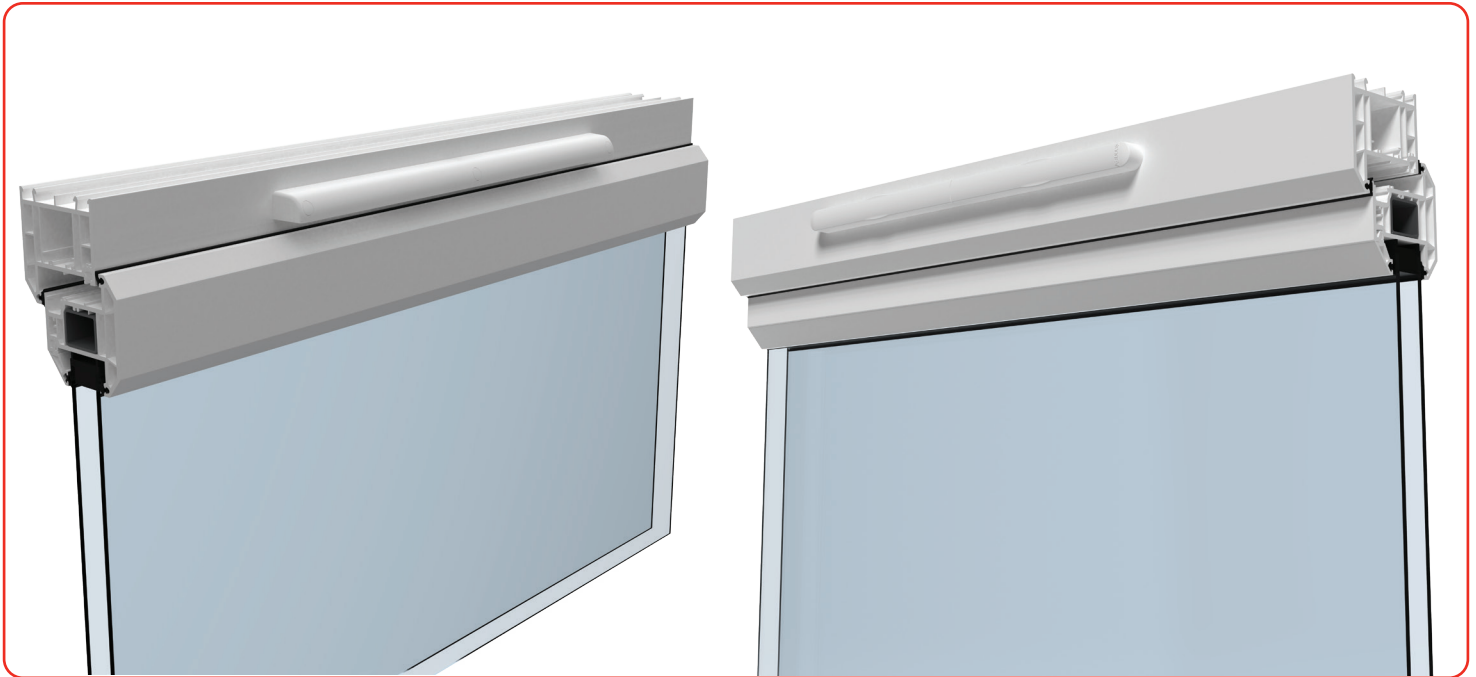

### Features

- Compact sleek design that sits discreetly within the window
- Smaller sized vent that is less intrusive and offers more discretion
- Easily fits into the sash of most windows
- Canopy extends only 25mm
- Aerodynamic feature directs the air flow efficiently through the vents pathway
- Developed to meet the minimum requirements of the building regulations Part F1:2010 (updated December 2021, for implementation June 2022)
- Ideal for the new building regulations as the vast majority of vents will be multiples of 4000EQA
- No over ventilation as you can achieve precisely 4000EQA or 8000EQA with multiple vents
- Improved dB noise reduction to new levels of performance whilst retaining the aesthetically pleasing design
- Available in a range of colours to complement the window. Mix and match internally and external vents to accommodate potential different finishes
- Supplied with fixing clips fitted, so the vent easily pushes into place. Installing within seconds
- The clips automatically centre the vent in the rout, aiding location ensuring it is fitted level on the window
- Option to screw fix if preferred, remove the screw caps before fitting and fix as normal

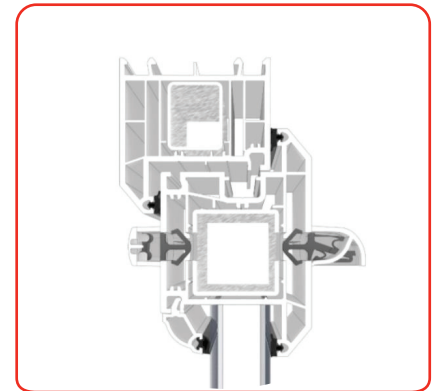

Profile cross section

### Technical Information

#### Equivalent area

Rout Height 13mm: 4000mm<sup>2</sup>

#### Acoustic D n,e,w (+/-) - vent open

Rout Height 13mm: 32\* (-1;1)

#### Acoustic D n,e,w (+/-) - vent closed

Rout Height 13mm: 41\* (0;0)

#### Air leakage

TBC m<sup>3</sup>/h TBC L/s

#### Watertightness

Tested to BS EN 13141-1 5000 vent – Resistant to water penetration using method 1A meeting Class 9A requirement up to and at 600pa in BS EN 12208

#### dB rating

Airborne sound insulation to BS EN ISO 10140-1:2016 and BS EN ISO 10140-2.



Mechanical  
Guarantee



PVCu

## 4000 Link Trickle Vent


### Ordering Details

#### 4000 Link Trickle Vent


Colour	Internal Vent	External Vent
White	WVELIWHCF4000	WVELEWHCF4000
Brown	WVELIBRCF4000	WVELEBRCF4000
Black	WVELIBLCF4000	WVELEBLCF4000
Grey (RAL 7016)	WVELIGRCF4000	WVELEGRCF4000
Agate Grey (RAL 7038)	WVELIGR7038CF4000	WVELEGR7038CF4000
Pebble Grey	WVELIPGCF4000	WVELEPGCF4000
Slate Grey (RAL 7015)	WVELIGR7015CF4000	WVELEGR7015CF4000
Quartz Grey (RAL 7039)	-	WVELEGR7039CF4000
Redwood	WVELIRWCF4000	WVELERWCF4000
Plain Golden Oak	WVELIOGCF4000	WVELEOGCF4000
Plain Irish Oak	WVELIIOCF4000	WVELEIOCF4000
Chartwell Green	-	WVELECGCF4000
Light Cream (RAL 9001)	WVELICR9001CF4000	WVELECR9001CF4000

Woodgrain Finish	Internal Vent	External Vent
Golden Oak	WVELIPWGOCF4000	WVELEPWGOCF4000

Other colours available, please contact us for the latest range.

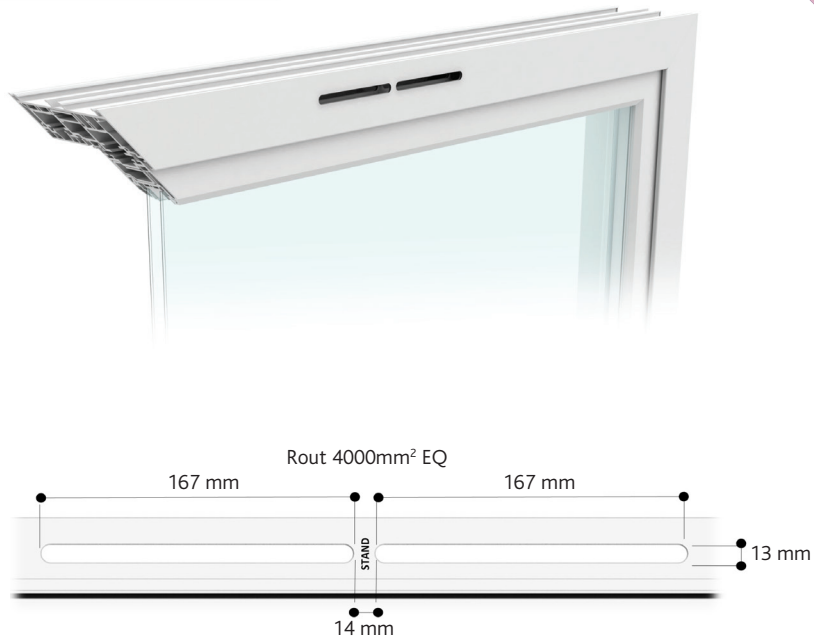

Internal				External								Ventilator			
Ventilator				Canopy				Grille (Timber, Sliding door, Sash)				Ventilator			
H (mm)	L (mm)	D (mm)	Weight (gram)	H (mm)	L (mm)	D (mm)	Weight (gram)	H (mm)	L (mm)	D (mm)	Weight (gram)	Attachment type	Rout H (mm)	Rout L (mm)	Stand W (mm)
18.5	380	15	21.32	18.5	380	25	39.90	20	383	5.8	9.84	Clip or Screw	13	348	14

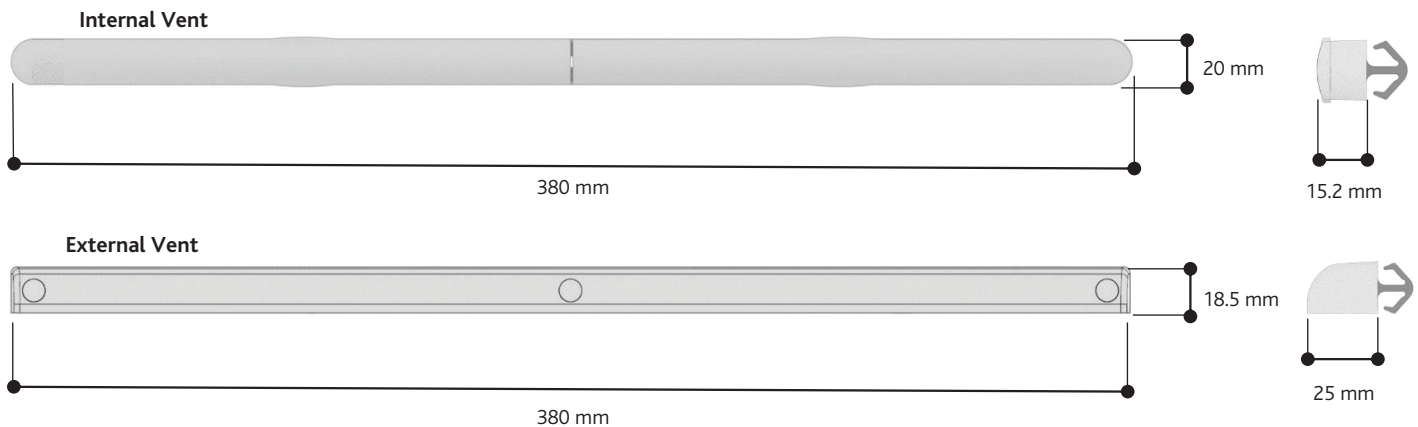

All dimensions are in mm. We reserve the right to change specification without notice. It is the responsibility of the window manufacturer and installer to ensure that the finished product meets any required building, safety and performance regulations.

### Packaging

#### 4000 Trickle Vent

Internal and external vents sold separately. 100 per box.